



Fibre-Glass Rod

Sahlins patented fibreglass rods are excellent aids for running pilot ropes in ducts. Their flexibility and smooth surface allows them to pass easily through narrow passages. The rod is also a good tool for inspection and cleaning of water & sewage pipes, and ventilation pipes.

Sahlin's fibre-glass rods are available in dimensions from 3 to 11 mm.


The rod is wound on a ball-bearing mounted and zinc plated steel stand



Fibreglass rod, 6 mm.
Frame diameter 500 mm.

Fibreglass rod, 9 mm.
Frame diameter 800 mm.
Can be used horizontally or upright.

Fibreglass rod, 11 mm.
Frame diameter 1050 mm. Used in long ducts.
When transporting over short distances, it can be rolled on the frame wheel.

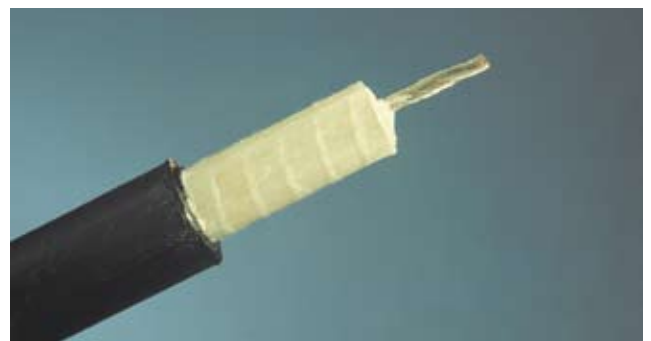


The rods consist of three parts: an inner copper conductor, a fibreglass reinforced core, and an outer casing made of HD Polyethylene, which is smooth, strong, and weather resistant. The integrated copper conductor enables the rod to be easily located by various methods.

Fibre Glass Rods with Copper Conductor

Rod-diam.	Comments	30 m.	40 m.	50 m.	60 m.	80 m.	100 m.	120 m.	150 m.	200 m.	250 m.	300 m.
6 mm.		8006-0030	8006-0040	8006-0050	8006-0060	8006-0080	8006-0100	8006-0120				
9 mm.		8009-0030	8009-0040	8009-0050	8009-0060	8009-0080	8009-0100	8009-0120	8009-0150			
9 mm.	With wheels	8009-1030	8009-1040	8009-1050	8009-1060	8009-1080	8009-1100	8009-1120	8009-1150			
11 mm.							8011-0100	8011-0120	8011-0150	8011-0200	8011-0250	8011-0300
11 mm.	With wheels						8011-1100	8011-1120	8011-1150	8011-1200	8011-1250	8011-1300

Accessories

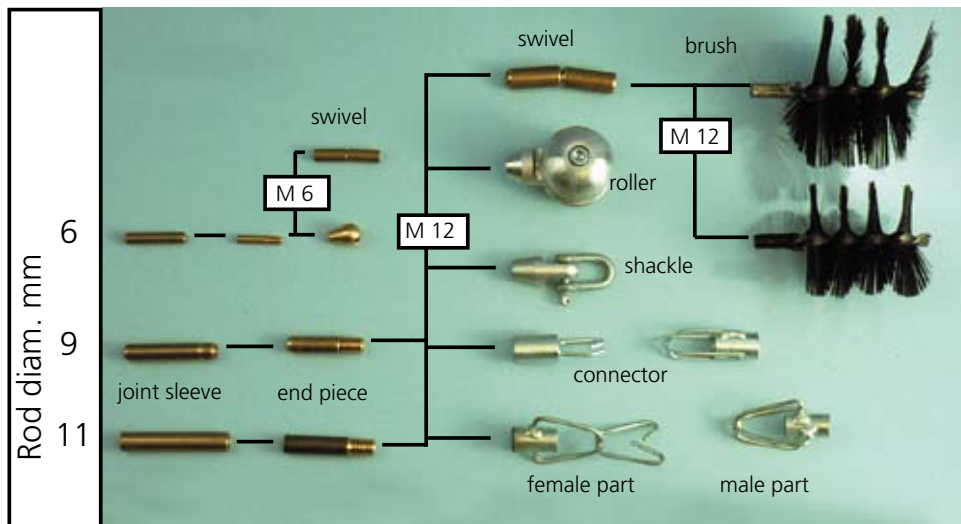

Joint Sleeve

M6-6 mm	P.No 8301-0620
M12-9 mm	P.No 8301-0920
M12-11 mm	P.No 8301-1120
M12-15 mm	P.No 8301-1520

Swivel

M6	P.No 8301-0650
M12	P.No 8301-0950

End Piece

M6-6 mm	P.No 8301-0610
M12-9 mm	P.No 8301-0910
M12-11 mm	P.No 8301-1110
M12-15 mm	P.No 8301-1510

Adapter for Fibre-Glass Rods

M12 x M10 female thread	P.No. 800-995-2
M6 female x M12 male thread	P.No. 806-998-1
M6 x M10 female thread	P.No. 806-998

Adapter for probe with spring

M12 x M10 female thread	P.No. 8304-5007
-------------------------	-----------------

Lead-in Head

M6 m ball	P.No 8301-0630
M12 with shackle	P.No 8301-0930
M12 roller ø50	P.No 8301-0931
M12 roller ø32	P.No 8301-0932

Brushes

Ø25 mm	P.No 8302-6025
Ø37 mm	P.No 8302-6037
Ø50 mm	P.No 8302-6050
Ø75 mm	P.No 8302-6075
Ø100 mm	P.No 8302-6100

Connector, Female Part

Max. pipe Ø25	P.No 8302-2025
Max. pipe Ø50	P.No 8302-2050
Max. pipe Ø70	P.No 8302-2070

Connector, Male Part

Max. pipe Ø25	P.No 8302-2026
Max. pipe Ø50	P.No 8302-2051
Max. pipe Ø70	P.No 8302-2071



Length Gauge to be fitted on the frame's rod guide.
P.No 8303-0010



Repair kit containing joint sleeves and special adhesive, as well as directions for use.

For 3 mm rod	P.No 8301-0340
For 6 mm rod	P.No 8301-0640
For 9 mm rod	P.No 8301-0940
For 11 mm rod	P.No 8301-1140
For 15 mm rod	P.No 8301-1540
Epoxy adhesive	P.No.8301-0040

SahlinaMina



Sahlins Mini-rod, SahlinaMina, (Ø 3 mm) is a flexible, tough and strong fiberglass rod which in most difficult and tricky applications replaces the conventional nylon pulling rod.

The Mini-rod is available in a cassette with an adjustable handgrip underneath, an eye on the side for quick and easy winding and rewinding of the rod and a rubber pulling-pushing grip on top. Under the rubber pulling-pushing grip hides a convenient compartment for storage of accessories.

SahlinaMina is available with 10 m, 20 m or 30 m fiberglass rod, complete with M5 start and end joints, flexible start spinner with eyelet, pulling-pushing grip and accessories.



"SahlinaMina" with accessories



Use the pulling-pushing grip to get extra force if needed.

P.No. 10 m. 8003-0010S
P.No. 20 m. 8003-0020S
P.No. 30 m. 8003-0030S