



ROPE



Polypropylene 3-braid rope.
 Available in white, black, blue, green and orange.
 Specific weight 0,91
 Strain at failure ^a 30 %.
 Lengths 220 m – 6 mm
 550 m – 8 mm
 1500 m – 8 mm

Dia mm	Weight g/m	Failure load kg
6	17	550
7	22	740
8	30	960
10	45	1425
12	65	2030
14	90	2790
16	115	3500
18	148	4450
20	180	5370

Polynite is a 3-braid polypropylene rope with extra high strength and low break elongation 10-14%. Available in white or white with a sprinkling colour. Lengths as above.

Dia mm	Weight g/m	Failure load kp
6	17	800
7	22	1080
8	30	1450
10	45	2130
12	65	2250
14	90	3050
16	115	3960
18	148	5000
20	180	6150


Polyester silk is made of 3-braid super-stretch polyester silk. It has a very high failure load and low break elongation (13%): It also has a good UV stability. Length 500 m

Other lengths and qualities of rope on request

STEEL WIRE ROPE


Sahlins Maskin can offer a various range of steel wire ropes.

Below are two of the standard types used for our winches.

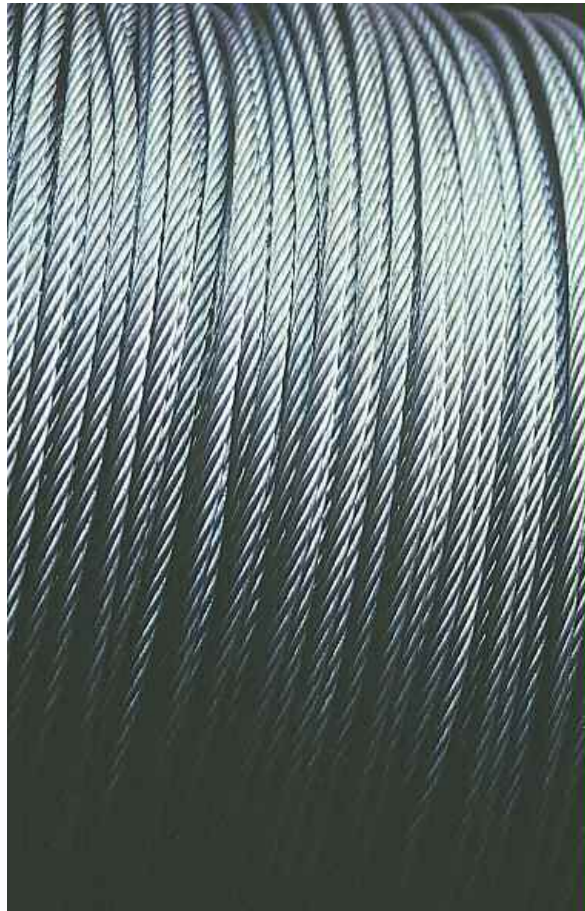

133 – strands

Dia mm	Area mm ²	Breake load kg
4	6,5	959
5	10,3	1500
6	14,8	2148
8	28,6	4130
10	44,8	6450

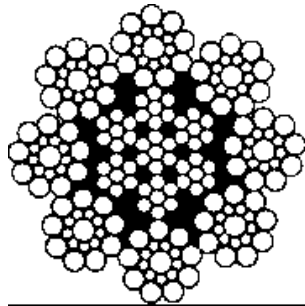

Polyass

Dia mm	Area mm ²	Breake load kg
6	16,1	2660
8	28,7	5000
9	36,3	6245
10	45,1	7450
11	54,6	9020
12	65,0	10735

